Control the Experience.

2013 Commercial Catalog

Spring 2013

It's in our DNA

Ask any professional integrator about URC and this is what they'll say: *quality without compromise*. We are best of breed and proud of it.

The world's most recognized audio and video brands rely on URC every day to provide them with the highest quality remote controls and solutions. Companies such as Sony, Denon, LG, McIntosh, Mitsubishi, Samsung, Sharp and many others have all relied on our remotes to control their components without fail.

We forged the path over 20 years ago when we began supplying remotes to the subscription broadcast, cable industry. In a channel where a defective remote means disruption of service, an expensive repair call and enormous customer bad will, failure is not an option. URC became the remote of choice for both worldwide and regional cable providers. Dedication to high quality is in our DNA and drives everything we do in the control and integration arena.

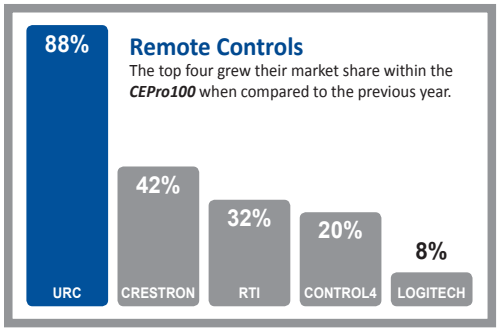

URC empowers the commercial integration market with innovative, flexible and reliable products that offer a greater value proposition than most any competitor. Our offerings range from the latest in-wall color touchscreens to advanced network system controllers to attractively-priced waterproof remotes and more.

Find out what 100 million customers already know: URC works.

Table of Contents

Total Control

User Interfaces	2 - 5
Network Controllers	6 - 9
Entertainment Sources	10 - 11
Amplifiers	12 - 15
Cameras	16 - 18
Automation	19
Accessories	20 - 22
Software	23 - 24

Complete Control

User Interfaces	26 - 31
Base Stations and Controllers	32 - 33
Accessories	34
Software	35

Total Control / Complete Control

Lighting	36 - 37
Training	38 - 40
About URC	41 - 42
Terms and Conditions	43 - 44

Total Control

URC's Total Control® products enable complete building integration with uncompressed multi-zone audio, climate control, energy monitoring/management, lighting control, streaming sources, and IP-based surveillance. This breakthrough system employs the latest in IP technology and advanced human ergonomics for control of boardrooms, home offices, houses of worship, classrooms and campuses, bars/restaurants, hotels and more.

The Total Control line consists of central control processors, extensive user interfaces, audio sources and amplifiers, and cameras, temperature and lighting products. Programming is streamlined and designed to accommodate commercial customization requirements through use of URC's Accelerator and TC Flex software platforms. And both programs offer the ability for off–site monitoring and updates, giving professional integrators more flexible, affordable options for their installations.

Additionally, Total Control is an exclusive line that's limited to direct URC dealers, which can set you apart in your market. This line is geared towards empowering you to build highly functional, user-friendly whole building or home control experiences for customers, while maximizing your business growth opportunities.

User Interfaces

TKP-7000 In-Wall Color Touchscreen

Enjoy adding a slick new Total Control interface to the mix. Featuring a 7-inch, 1024 x 600 full-color graphical screen, the TKP-7000 is an intuitive control device for things most important to your clients including entertainment, lighting, climate, security, and more. The TKP-7000 offers extraordinary graphic feedback. With URC cameras, the TKP-7000 can display live video from in and around the building. Experience a customizable status bar for at-a-glance desired info (weather, time, etc.), Rooms menu for a snapshot of what's happening everywhere, a shortcuts pop-up, and more. Every screen can be changed by using finger "swipes."

Key Features / Specifications

- 7-inch, 1024 x 600 full-color graphical touchscreen
- Two-way feedback from URC and compatible third-party devices
- Capable of displaying live video from URC cameras
- Wall-mountable and mounts conveniently to a 2-gang work box
- Microprocessor: ARM
- Memory: 256Mbytes of Flash, 256Mbytes of DDR2 SDRAM
- Devices: Supports up to 255 devices
- Network: One 10/100 Ethernet port (PoE)
- LCD: 7 inch (1024x600)
- Power: Standard PoE Injector or PoE Switch (purchased separately)
- Size: 7.5" x 5" x 0.9" (W x H x D)
- Weight: 0.77 lbs

TKP-2000 Graphical In-Wall Touchscreen

Provide convenient graphic-based access and enhanced operation in an in-wall controller; install a Total Control TKP-2000 in your client's commercial facility and you give them a window on the world—as well as a powerful and robust control interface! The large, crystal clear 3.5" touchscreen is surrounded by six backlit buttons that are customizable. The advanced TKP-2000 displays metadata from all URC devices and select third-party components, as well as URC information feeds like news and weather. Install one in boardrooms as needed—every place where it's more convenient to have a permanently attached eye-level interface.

Key Features / Specifications

- 3.5" color touchscreen
- Six customizable backlit buttons
- Two-way metadata display for URC and select third-party devices
- Ethernet connectivity
- Displays URC Information feeds (weather and news)
- Displays URC surveillance cameras
- Fits standard dual-gang electrical box
- PoE (Power over Ethernet)
- Cover plates come in white, black and almond
- Display: 3.5" color touchscreen LCD
- Network: One (1) 10/100 Ethernet port (PoE)
- Status Indicator: 6 backlit hard buttons
- Power: PoE switch or PoE injector required
- Size: 5.7" x 4.7" x 1.8" (W x H x D)
- Weight: 0.61 lbs

TKP-100 In-Wall Keypad

More than a conventional volume control, TKP-100 provides power, source selection and sophisticated, contemporary design in addition to volume control. Installed easily in a standard single-gang electrical box and powered via one Cat5 cable, this seven button keypad includes both URC Music and URC Lighting default button sets. It practically programs itself when default button sets are used. For special applications, customized buttons are available. For the benchmark in convenient operation, all buttons are backlit and provide status feedback.

Key Features / Specifications

- Seven (7) customizable, backlit buttons with status feedback
- Includes both URC Lighting and Music default button sets
- Automatic programming when default button sets are used
- Fits standard single-gang electrical box
- PoE (Power over Ethernet)
- Cover plates are not included (accepts standard Decora® plates in a variety of colors)
- Macro Capability: 7 programmable macro buttons
- Network: One (1) 10/100 Ethernet port (Indicator 2LED, PoE)
- Indicator: 7 customizable buttons (orange / white feedback in most cases)
- Power: PoE switch or PoE injector required
- Size: 1.8" x 4.1" x 1.3" (W x H x D)
- Weight: 0.18 lbs

TRC-1280 Wi-Fi Remote Control

Put Total Control in your clients' hands with the premium, elegant TRC-1280. Its large, clear color touchscreen provides vibrating "haptic" feedback that confirms button presses for an exceptional user experience. The TRC-1280 displays two-way metadata for all URC and select third-party components—it even displays the live signal feed from URC surveillance cameras! As attractive to look at as it is convenient to operate, the TRC-1280 rests in its charger base so that it's always at full power and ready to connect to the network in a flash with URC's "quick connect."

Key Features / Specifications

- Large 2.8" color touchscreen with haptic feedback
- Two-way metadata display for URC and select third party devices
- Displays URC Information feeds (weather and news)
- Displays URC surveillance cameras
- Quick Connect Wi-Fi
- Display: High efficiency 2.8 inch (TFT LCD) 262K Colors
- Touch Screen Type: Resistive
- Capabilities: Essentially unlimited. Routes commands to 32 rooms through an advanced MRX network system controller
- WiFi: B/G (supports WEP, WPA and WPA2)
- Charging Base: 5V External Power Supply
- Power: Lithium Polymer rechargeable battery (included), 1330mAh
- Size: 1.9" x 8.5" x 1" (W x H x D)
- Weight: 0.30 lbs

TRC-780 2.4 GHz RF Remote Control

A simple and powerful remote control, the stylish TRC-780 features an ultra-high tech OLED display that is more energy efficient and easier on the eyes than conventional LED displays. It also delivers a wider viewing angle, which makes it more convenient to use. Powered by four AA alkaline batteries, the TRC-780 is ergonomically designed to provide the utmost in handling and comfortable operation.

Key Features / Specifications

- Comfortable, ergonomic wand-style design
- OLED Color display
- Two-way metadata display providing text for URC devices (provides graphics for THZ-100 Thermostat)
- Display: 1.5" inch (128x128) 65K Colors Passive Matrix (PM) OLED
- Capabilities: Essentially unlimited. Routes commands to 32 rooms through an advanced MRX network system controller.
- Range RF (radio frequency): 50 to 100 feet, depending upon the environment
- RF Frequency: 2.4GHz Two-Way
- Power: Four AA Alkaline Batteries (included)
- Size: 2.2" x 8.7" x 1.3" (W x H x D)
- Weight: 0.50 lbs

Total Control Mobile™ App

Exciting two-way app for Total Control! This new mobile app enables users of Total Control® systems to access all the benefits of Total Control through three additional popular devices—the iPad®, iPhone® and iPod touch® over their local area network and remotely from a different location using our new offsite remote access and control feature. With an intuitive graphical interface, clients can control music, video, URC lighting, surveillance and more. This app works with the MRX Advanced Network System Controllers, and can be downloaded from the iTunes store. Once paired with the system's MRX unit using the purchased setup code, up to 32 iDevices can be used. Downloading the app is free. There is a one-time setup charge, and no per-device fee.

*The **Total Control Mobile™** app must be programmed and activated by a custom installation professional.*

Key Features / Specifications

- Full two-way control of Total Control system, same as TKP-2000
- Offsite access and control of Total Control system from iDevices
- Full cover art and metadata (SNP-1 and PSX-2)
- Supports select third-party two-way modules
- MRX Advanced System Network Controller unit required in system

universalremote.com/mobile

Network Controllers

MRX-10 Advanced Network System Controller

Every Total Control installation begins with an MRX-10, the brains of the system. The MRX-10 stores and issues one-touch automation commands for all components throughout the building over the network. It provides lightning-fast response time with 100% accuracy and no outside interruptions. When operated by a Total Control remote control, keypad or touchscreen, the MRX-10 provides powerful two-way system status feedback to allow control of components in any room, with any remote, from anywhere on the network. The MRX-10 enhances the control experience by enabling your clients to control virtually any type of component over the network, even if it's not equipped with network technology. Additionally, the MRX-10 can route automation commands to multiple MRX units on the network enabling control in any additional zone at any time.

Key Features / Specifications

- Stores and issues commands and macros via IR, IP, RS-232, Relays and Triggers
- Provides two-way communication with all Total Control remotes, touchscreens and keypads
- Routes commands to any MRX unit on the network
- Provides automation via user-scheduled events or on-board sensors
- Off-site programming capable when system is registered
- Compatible with URC lighting utilizing the optional RFTX-1 RF transmitter
- Easy rack mounting (requires RMK-1)

MRX-10 Key Features / Specifications (Continued)

- MRX-10 is required in all Total Control systems; maximum one per system
- Network: One (1) 10/100 Ethernet port
- IR: Eight (8) adjustable IR ports powered by independent IR Engines for simultaneous use
- RF Frequency (TRC-780 & THZ-100): 2.4GHz
- RF Range (TRC-780 & THZ-100): 50 to 100 feet (environment dependent)
- Programmable 12V Outputs: 2 (On, Off or Momentary)
- USB: 1 (for future use)
- DC Trigger Output: 12V/0.2A 2 Port OUT (programmable out)
- Relays: 2 (NO, NC or Momentary)
- RS-232: 4 ports (support TX, RX and GND two-way communication)
- Sensors: 4 ports (use URC or 3rd party sensors)
- Power: 12v external power supply
- Size: 17" x 1.7" x 8.7" (W x H x D)
- Weight: 4.50 lbs

MRX-1 Network Base Station

The MRX-1 Network Base Station bridges the digital divide between control of clients' legacy components and the IP network. Acting as a Total Control sub-base station, it receives commands from an MRX-10 and reissues them via IR, RS-232, or Relays. Each MRX-1 has the following: one relay, one sensor port, two RS-232 ports and 6 IR ports. The advanced connectivity of the MRX-1 allows it to connect to virtually any device or component.

Attention CCP Programmers: the MRX-1 can also be installed independent of Total Control and operated by a URC MX-5000 or KP-4000C remote (which are not compatible with Total Control).

Key Features / Specifications

- Receives commands sent from MRX-10 and reissues them via IR, RS-232, and Relays
- Up to 32 controllers can be added to any Total Control system
- Enables URC Lighting control via optional RFTX-1
- One LAN connection, one Relay, two RS-232, six IR ports, one Sensor port
- Network: 10/100 Ethernet port
- Relay: One (NO, NC or Momentary)
- Sensor: One (for use with URC or third-party sensors)
- RS-232: Two (2) RS-232 (supports TX, RX and GND two-way communication)
- IR: Six (6) adjustable IR ports (Note: #6 IR Output requires the included sleeved emitter and can be optionally used to connect an RFTX-1)
- Power: 12v External Power Supply
- Size: 9.8" x 1.1" x 4.7" (W x H x D)
- Weight: 0.52 lbs

MRX-4IR Network Base Station

The MRX-4IR is an elegant little solution for places you don't want to run Cat5, use a separate remote, or where it doesn't make sense to add an Advanced MRX Network Controller. Communicating over a network using Wi-Fi or a wired LAN connection, the MRX-4IR receives commands from the System Controller and relays them, via IR, to other devices in the system. It features four IR flasher outputs and a front IR blaster. One classic application is controlling the display in the front lobby where there is no room for a larger box. Or use it to control ceiling-mount projectors, or flat panel TVs over a cabinet. Plus, its small size allows it to fit into places where a traditional base station would not.

The MRX-4IR can also be installed independent of Total Control and operated by an MX-5000 or KP-4000C remote (which are not compatible with Total Control).

Key Features / Specifications

- Converts IP commands from MRX Advanced System Controller to IR
- Four IR flasher outputs (one adjustable, three fixed)
- Built in front IR Blaster
- Very small footprint
- Includes mounting hardware
- Ethernet: One (1) Base-T/100 Base-TX network connector
- IR: Four (4) flasher outputs and a front IR blaster
- MRX Advanced System Controller required
- Input: 120V, 60Hz, 9W
- Output: DC 12V, 1A
- Power: Via an AC/DC adapter
- Size: 3.7" x 0.9" x 2.8" (W x H x D)
- Weight: 0.24 lbs

“With Total Control’s IP-based technology, our installations are more future-forward than ever. The entire system sits on the network, which is where everything is heading. The flexibility of URC’s Total Control system is virtually unlimited! It’s our control system of choice.”

- Brian K. Williams, Owner
Custom Integrated Solutions, Youngstown

MRX Controller Example Application Diagram

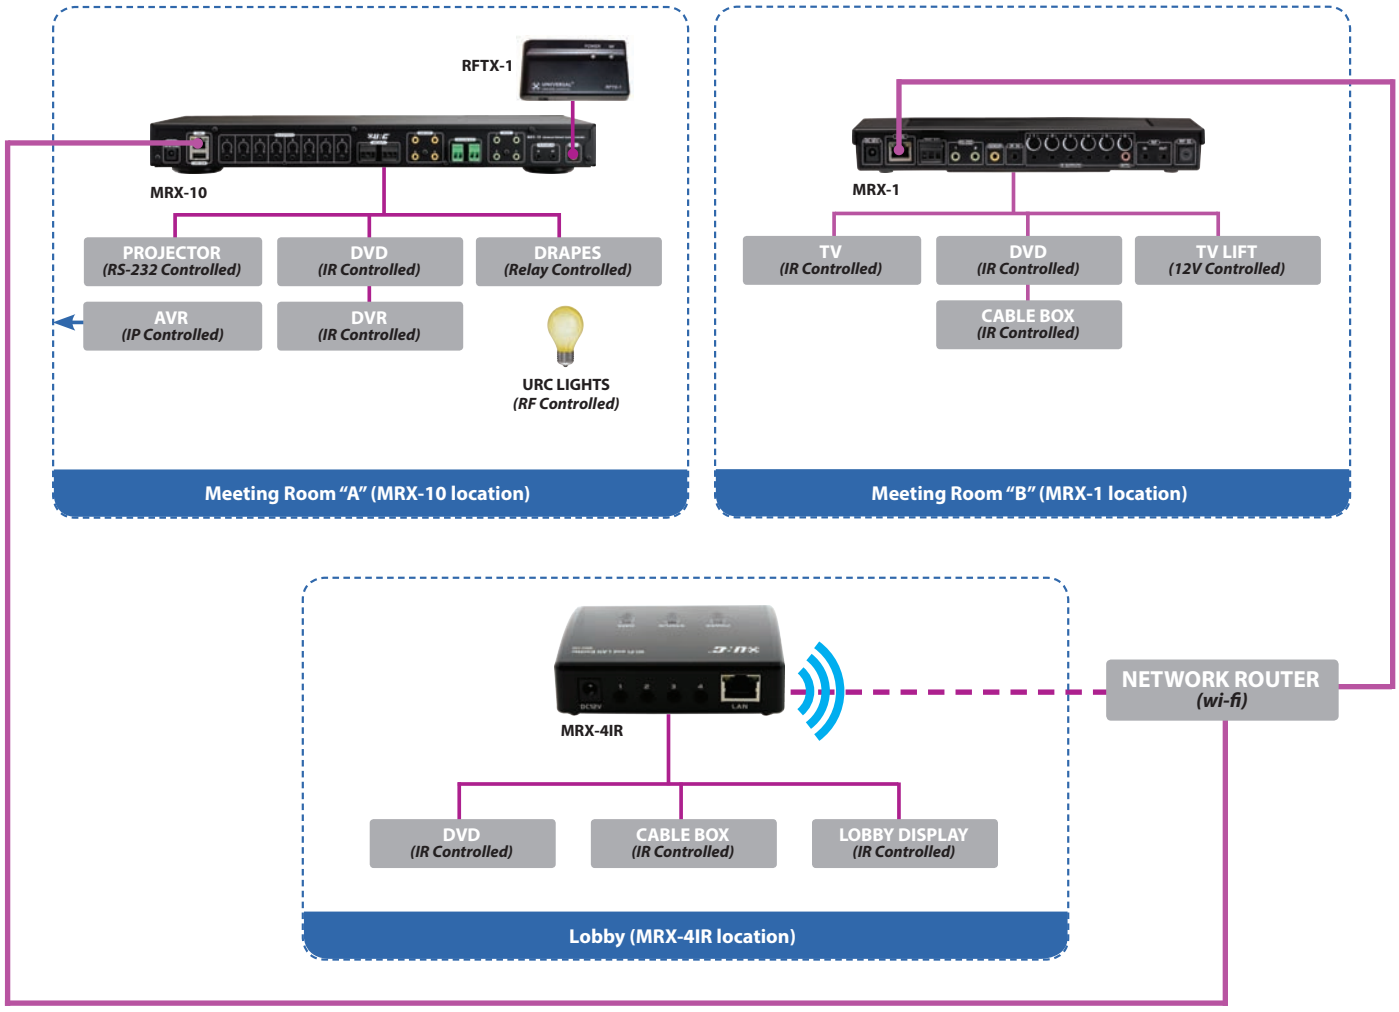

Please note: The MRX-10 Advanced Network System Controller can route commands to the proper MRX unit provided each MRX unit is connected to the same Local Area Network (LAN).

Entertainment Sources

SNP-1 Streaming Network Player

The Total Control streaming network player connects anywhere on the network and provides your clients with a powerful yet easy way to access and distribute their favorite music. Browse by artist, album, title and more, from any Total Control remote control, keypad or touchscreen. Clients can listen to personal collections, Internet radio and other popular services anywhere in the building—even outdoor. The SNP-1 is unique, delivering music in its original, full quality, and synchronizing it everywhere.

Key Features / Specifications

- Streaming output via 44kHz streams to Total Control DMS-series amplifiers
- Plays music stored on network PCs or networked hard drives
- Analog outputs for compatibility with other brand systems
- Full two-way communication on all Total Control remotes, keypads and touchscreens via an MRX-10
- IR input extends compatibility to any URC base station
- On-screen GUI provides music metadata and easy navigation of control features
- Easy rack-mounting (requires RMK-1)
- Control: IR input (one-way), IP (two-way)
- Audio Out: L/R analog
- Digital Audio Out: S/PDIF (coax digital)
- Video Out: Component video (Y, Pb, Pr)
- Network: 10/100 Ethernet port
- Power: 12V external power supply
- Size: 17” x 1.7” x 8.7” (W x H x D)
- Weight: 4.50 lbs

Please note: Music and music-related content played in public locations must be properly licensed from the provider. Refer to the music service providers’ End User License Agreement (EULA) for specifics.

“The New Era Cap Company asked us to install a system that would be easy for all their clients and employees to use to access entertainment. We knew URC Total Control was the best way to go. We’d used other touchpad control systems in the past, and nothing works as well as Total Control.”

- David P. Whalen, Sales Manager
Advanced Alarm, Inc.

PSX-2 Personal A/V Server with Onscreen GUI

The award-winning PSX-2 turns every iPod into an incredible, easy-to-navigate personal music server. With one button press from any URC remote, your customers can do things that could take dozens of presses on the iPod alone. The PSX-2 incorporates advanced features such as alpha search, sort by name, “one touch to music” and numerous other smart shortcuts that simplify the navigation of music content. There’s even a fully configurable, plasma-friendly TV screensaver that continually displays cover art, artist and track info.

Key Features / Specifications

- Two-way onscreen content browsing and selection with cover art
- Advanced alpha search features get users to music faster
- Shortcuts make navigation to favorite music much easier
- “Play more from…” any artist, genre, album expands and automates operation of the iPod
- Includes PSX Link Software for PCs for wireless syncing
- Compatible with all iPhones and iPods (except first generation)
- Front Panel IR Sensor: Receives URC PSX-2 commands via IR
- IR Range: 20-30 feet, depending on the environment
- Rear Panel IR Input: Compatible with all Complete Control MRF and MSC base stations
- Ethernet: 10/100 MHz
- Audio: Two (2) RCA audio output connectors (L + R)
- Component Video (Y/Pr/Pb): 3 RCA video output connectors
- Power: 5V DC (wall adapter included)
- Size: 6.7” x 1.6” x 5” (W x H x D)
- Weight: 0.94 lbs

Note: The PSX-2 cover art display feature must be disabled for compatibility with the following iPods only: All generation iPod Classic models, all generation iPod Nano models.

This product can also be used in conjunction with Complete Control systems.

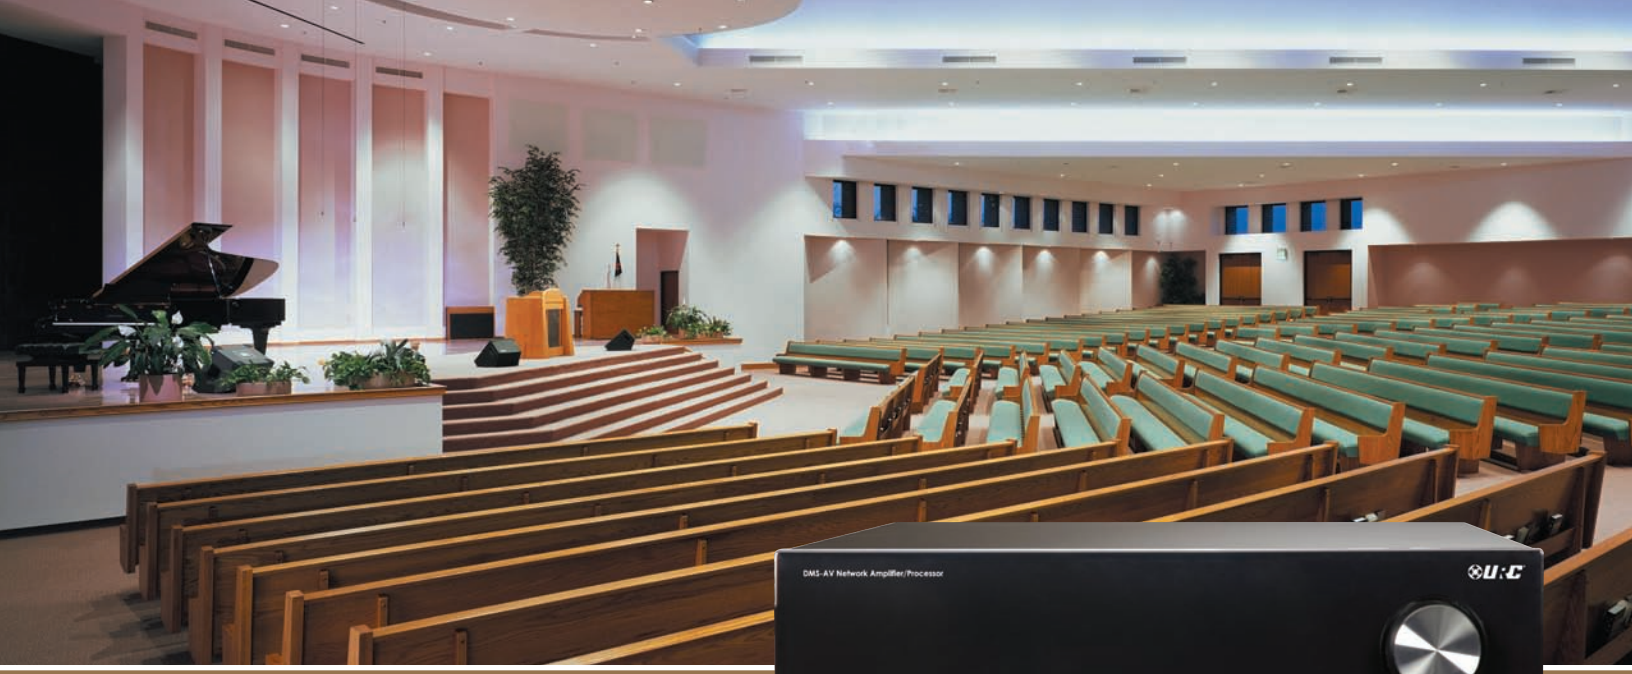

Amplifiers

DMS-AV Network Amplifier/Processor

Designed from the ground up to be an integral, seamless part of Total Control, the DMS-AV is a groundbreaking piece that delivers incredible realism and power to movies and music, integrating seamlessly with all DMS amplifiers to deliver a fully integrated system. Providing crystal clear audio and video, the DMS-AV incorporates 7.2 surround sound, Dolby® TrueHD, DTS-HD Master Audio™ and URC's proprietary multichannel stereo and surround modes. Plus, your clients can enjoy true video scaling up to 1080p—with a musical performance to match!

When installed with URC's Total Control® or Complete Control™ system, you gain a level of ease-of-use that's unparalleled. From handheld remotes to brilliant in-wall touchscreens—and even the iPad®—it takes one touch to dim the lights and start a movie right on cue. Even take a legacy CD player or analog source and stream music from it into other rooms—and control song choice and volume from anywhere. This is a great retail solution. With the DMS-AV you gain a foundation piece that is capable of growing with your clients as their needs change. Add other URC DMS Amps for a staggering number of audio inputs.

DMS-AV Key Features / Specifications

- 125 W/ch @ 8 Ohms, stable to 4 ohms
- 7.2 Dolby Digital capable
- Automated room calibration using included microphone
- Latest Dolby True HD and DTS codecs supported
- Can stream 2 analog inputs (including Phono) to other DMS-series products
- True analog discrete amplifier performance (Class A/B)
- Streams sources in up to 31 additional zones by adding DMS-Series Amplifiers
- Up to 1080p video upscaling on all inputs, 3D TV capable
- ARC return channel
- On-board video calibration test pattern generator
- Lip sync audio correction up to 200ms
- Progressive Video ReProcessing
- Pass-through video mode for HDMI sources
- Programmable through URC's MRX-Series Advanced Network System Controllers
- Compatible with URC's CCP control products for most functions (MX remotes/KP keypads)
- I/O: (5) HDMI 1.4a inputs, (2) Component inputs, (4) Composite inputs, (1) HDMI output
- (Upscaling: SD and HD precision motion adaptive de-interlacing and precision 10bit video scaling for up-conversion to 1080p/24fps)
- PAL Support: Support for 24 fps video pass-through and PAL video formats
- HDMI Support: HDMI 1.4a Deep Color support with 12-bit output
- Noise Reduction: MPEG digital noise reduction on both SD and HD
- Video Scaler: ABT2015 with graphic on-screen display
- Audio Output: 125 W/ch @8 Ohms 20Hz-20kHz, all channels driven. 140 W/ch @4 Ohms 20Hz-20kHz, all channels driven (all channels share same rating)
- Total Harmonic Distortion: <0.05%
- Dolby: Dolby® TrueHD and DTS-HD Master Audio™
- Size (with feet): 17" x 6.5" x 15" (W x H x D)
- Weight: 31.40 lbs

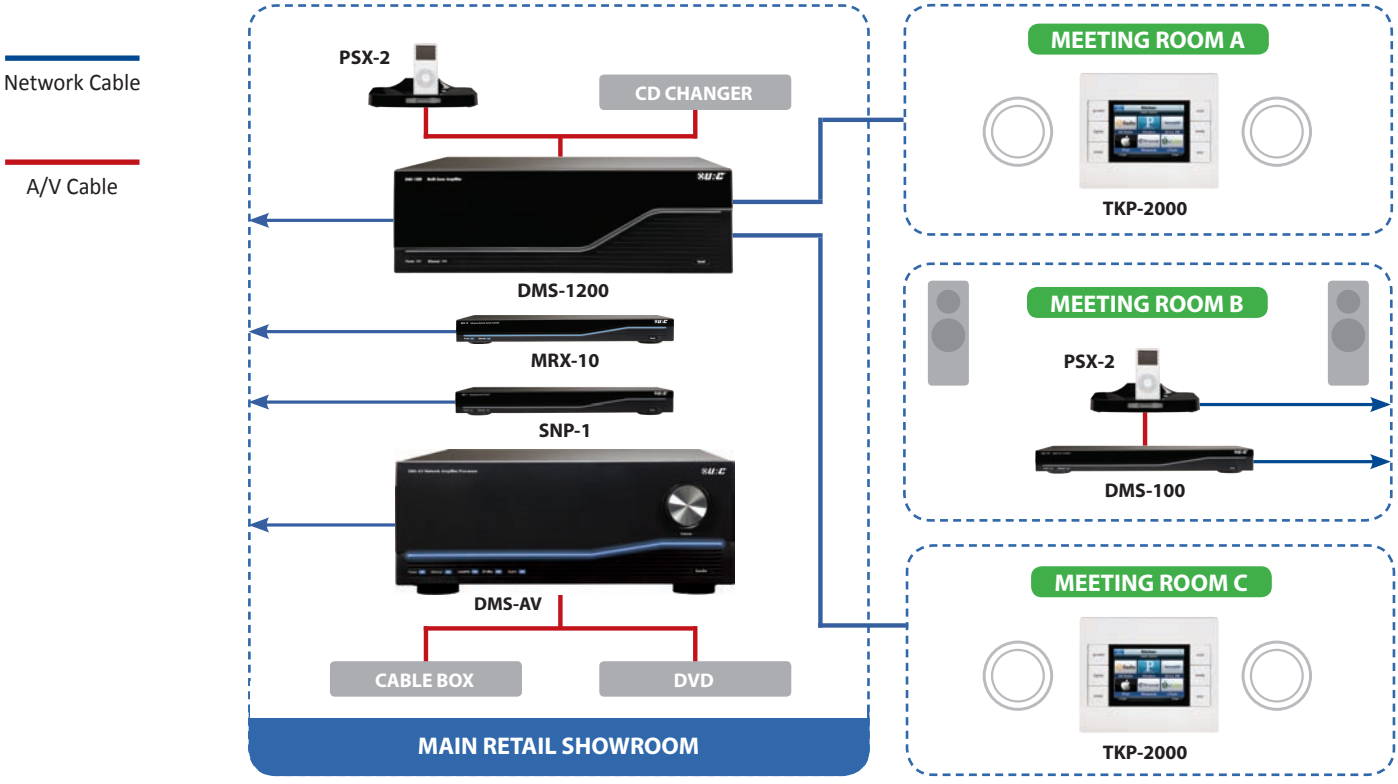

DMS-1200 Network Multi-Zone Amplifier

This amplifier provides high-powered crystal clear audio from any music source of choice. Installed as a standalone central amplifier, you get up to 8 individual zones at a very compelling price. Infuse your streaming music services and Internet radio into a DMS-1200 multi-zone system by adding the URC SNP-1 streaming network player. Stream Pandora®, Rhapsody™, SiriusXM®, vTuner Internet radio, and other services to the hotel pool area independently without interfering with the lobby playlist.

Key Features / Specifications

- Eight (8) zones; expandable up to 32 zones with use of other DMS-series amplifiers
- Four (4) analog-to-digital inputs that stream to other DMS-series amplifiers
- Can be programmed off premises via the Internet, MRX-10 and future-specified URC controllers
- Receives all streams from SNP and DMS-series amplifiers
- Easy rack mounting (requires RMK-3)
- MFS-8 or MFSPOE-8 MAC-filtering Network Switch required
- Rated Output: 50 W/ch (zones 1-6), preamp level (zones 7-8), stable to 4 Ohms
- Network: 10/100 Ethernet port
- Control: IR (one-way), IP (2-way) control
- Indicators: Power (blue LED; blinks when resetting), Network (blue LED)
- Zones of Stereo Audio: Eight (six powered zones, two pre-amp only zones)
- Rated Wattage per Channel: 50 W/ch @ 8 Ohms, stable to 4 Ohms
- Automatic Low Volume Loudness Compensation: Installer configured for type and size of audio zone
- Installer Configured EQ: Bass Boost, Treble Boost, 5-band parametric EQ
- Input sensitivity: 600~2200mVp-p / 10Kohm
- User Adjustable Audio Controls: Bass, Treble and Balance
- Inputs: 4 stereo line inputs (all stream to all other DMS Amplifiers)
- Zone 7 and 8 Preamp Output Options: Fixed / variable line level output (each with 12V trigger)
- Power: AC 100~245V, 50/60Hz
- Power Consumption: 3~6A
- Size: 17” x 5.2” x 16” (W x H x D)
- Weight: 26.70 lbs

DMS-100 Network Single-Zone Amplifier

Add premium audio quality streams to any one area of a commercial facility with the DMS-100. This versatile single-zone network amplifier can be installed as an additional zone with a DMS-1200 system, or installed in multiples to create a customized multi-zone system. One audio input on board allows you to plug in any music source. Add additional zones of audio anywhere at any time following the same simple formula. With multiple DMS amps you can share audio sources across zones, up to 32 sources in total, all playing independently at the same time and with no audible signal degradation.

Key Features / Specifications

- 50 w/ch @ 8 ohms, stable to 4 ohms
- Preamp output for connection to local amp or receiver
- One (1) audio input streams to other DMS-series amplifiers
- Receives all streams from SNP and DMS-series amplifiers
- Can be programmed off premises via the Internet, MRX-10 and future-specified URC controllers
- Easy rack-mounting (requires RMK-1)
- MFS-8 or MFSPOE-8 MAC-filtering Network Switch required
- Rated Wattage per Channel: 50 W/ch @ 8 Ohms, stable to 4 Ohms
- Network: 10/100 Ethernet port
- Control: IR (one-way), IP (two-way) control
- Indicators: Power (blue LED; blinks when resetting), Network (blue LED)
- Zones of Stereo Audio: One (preamp and speaker output are linked)
- Automatic Low Volume Loudness Compensation: Installer configured for type and size of audio zone
- Installer Configured EQ: Bass Boost, Treble Boost, 5-band parametric EQ
- Input sensitivity: 600~2200mVp-p / 10Kohm
- User Adjustable Audio Controls: Bass, Treble and Balance
- Inputs: One (1) stereo line input (streams to all other DMS Amplifiers)
- Preamp Output: Configurable to fixed line level output
- Power: AC 100~245V, 50/60Hz
- Power Consumption: 1~2A
- Size: 17” x 1.7” x 8.7” (W x H x D)
- Weight: 7.0 lbs

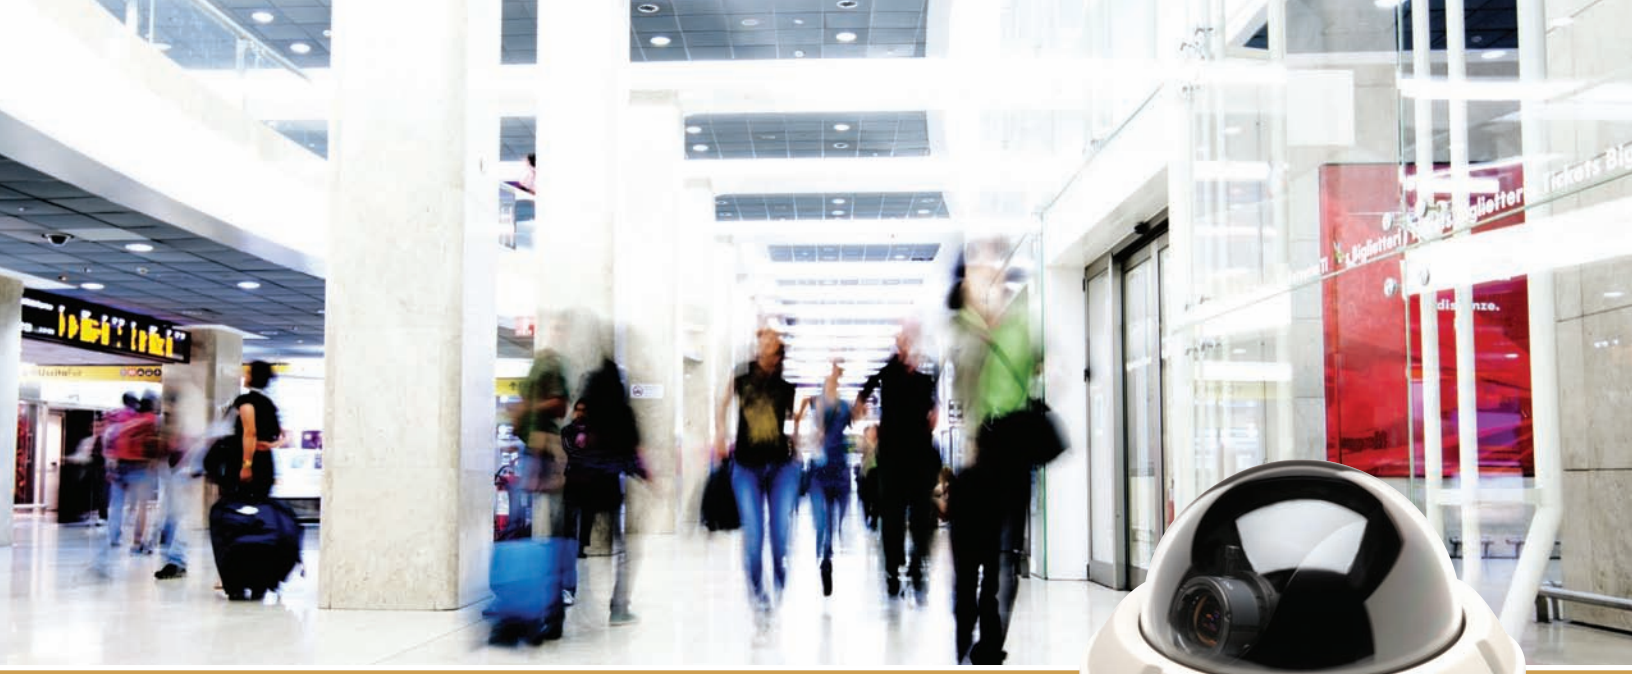

Cameras

CAM-DC0/CAM-DC1 Surveillance Cameras

The two newest Total Control surveillance cameras are handsome, compact and easy to deploy. Choose the unobtrusive indoor mini-dome, or the tough, vandal-proof outdoor dome camera—we have the right camera for every need. Models offer H.264/MJPEG compression, motion detection, web-based set-up, administration, control and upgrade, and all models feature a 32-bit embedded CPU running Linux.

Common Key Features / Specifications for both Cameras

- Viewable on Total Control® TRC-1280, TKP-2000, TKP-7000 and Complete Control™ KP4000 / 4000C
- Viewable on PCs, iPad®, iPhone® and iPod touch®
- H.264/MJPEG dual encoding and transmission
- 1/3” D1 progressive scan CMOS image sensor
- Lens: 3.8mm, F2.0 aperture, fixed, non-zoom
- Resolution: 720x480 / CIF = 352x240 / QCIF = 176x112
- 4.0 Lux rating
- Web-based administration, setup, control and upgrade
- Security: Channel-based user password protection for live-cast, alarm output and audio
- Auto or forced switch to Black and White capability
- 32-bit embedded CPU running Linux, 128MByte SDRAM, 128MByte NAND Flash
- Power: PoE power supply support (router, switch or injector)

Additional Specifications for CAM-DC-I (Indoor)
- Plastic mini dome IP camera
- Indoor only use
- Live video up to 30 fps @ VGA resolution
- Size / weight: 98.5 Diameter x 70.0 (H in mm), 200g (Camera only)

Additional Specifications for CAM-DC-O (Outdoor)
- Vandal-proof, weatherproof mini dome IP camera
- Indoor/outdoor use
- Live video up to 30 fps @ D1 resolution
- Size / weight: 120 Diameter x 93.0 (H in mm), 593g (Camera only)

MC-70VC VGA PoE IP Camera

Small indoor camera ideal for monitoring nursery.

Key Features / Specifications
- Live video up to 30 fps @ VGA resolution
- CMOS sensor
- Low light capable (4~10,000 Lux operation)
- Viewable on TRC-1280, TKP-2000, TKP-7000, iOS app, and networked PCs
- H.264/MJPEG dual encoding and transmission
- Simultaneous dual streaming
- PoE included (separate unit)
- Unit is powered by included PoE / supplied power supply
- Resolution: VGA = 640x480 / CIF = 320x240 / QCIF = 160x140
- Lens: 4.3mm f2.0
- Weight: 0.40 lbs without power supply

MC-73CB Box-Type PoE IP Camera

High resolution multipurpose box camera.

Key Features / Specifications
- Super HAD CCD sensor, D1 (720x480) resolution at 30 fps
- Low light capable; useable at 0.3 Lux (color) 0.002 Lux (mono)
- Viewable on TRC-1280, TKP-2000, TKP-7000, iOS app, and networked PCs
- H.264/MJPEG dual encoding and transmission
- Simultaneous dual streaming
- PoE powered or use supplied power supply
- Resolution: D1 = 720x480 (NTSC) / 720x576 (PAL); 4CIF = 704x480 (NTSC) / 704x576 (PAL); CIF = 352x240 (NTSC) / 352x288 (PAL)
- Lens: CS Mount type Lens
- Default Lens: DC IRIS Varifocal lens 3-8 mm, 1/3”, f1.4, CS mount
- Weight: 0.70 lbs without power supply

MC-75CD Dome-Type PoE IP Camera

Vandal-proof, weather-proof dome camera.

Key Features / Specifications

- Super HAD CCD sensor, D1 (720x480) resolution at 30 fps
- Low light capable; useable at 0.3 Lux (color) 0.002 Lux (mono)
- Viewable on TRC-1280, TKP-2000, TKP-7000, iOS app, and networked PCs
- H.264/MJPEG dual encoding and transmission
- Simultaneous dual streaming
- PoE powered or use supplied power supply
- Resolution: D1 = 720x480 (NTSC) / 720x576 (PAL); 4CIF = 704x480 (NTSC) / 704x576 (PAL); CIF = 352x240 (NTSC) / 352x288 (PAL)
- Lens: DC IRIS Varifocal 2.8-10.5 mm, f1.2 board mount lens
- Weight: 1.98 lbs without power supply

Common Key Features / Specifications for Cameras

- Video Encoding: MJPEG/H.264 (simultaneous dual stream), H.264/MJPEG, H.264/H.264 (true H.264 dual streaming) simultaneous streaming with independent control
- Audio Encoding: 8 bit PCM (G.711-u-low)
- Sampling rates: 8KHz, Mono Audio
- Security: Channel-based user password protection for live-cast, alarm output and audio
- Working Environment Temperature: 32~122 °F (0~50 °C) / Humidity: 20~80% RH

Automation

Note: TRC-1280 not included with THZ-100.

THZ-100 Advanced Thermostat

URC's THZ-100 is a colorful, easy-to-integrate thermostat and is a new addition to URC's Total Control lineup. With dozens of advanced features, the THZ-100 is a very smart choice for your installs. Clients can easily control the climate from anywhere using Total Control remotes, keypads, touchscreens and iDevices. This beauty features Intelligent Comfort Recovery, password protection and an optional wired remote sensor to increase efficiency and accuracy of temperature adjustments.

Key Features / Specifications

- 2" full color backlit LCD display
- Five (5) hard buttons (three soft labeled, two for navigation)
- Intelligent Comfort Recovery for system efficiency
- Password protection feature
- Screen brightness, timeout and auto dimming features
- Programmable via the Internet via MRX-10 Advanced Network System Controller
- Interface: 2" LCD and five (5) hard buttons
- Range: 40 degrees to 95 degrees Fahrenheit for set points
- Configuration: Programmable via URC's Accelerator or ThermoControl software
- Hardware certification: FCC, UL, CSA, CE, Australia, New Zealand
- Power: Via the HVAC system, typically 24 VAC
- Size: 4.1" x 3.1" x 1.9" (W x H x D)
- Weight: 1.0 lbs

Total Control Accessories

MFSPOE-8 MAC Filtering Network Switch with PoE (Power over Ethernet)

Protect the network and provide power to PoE devices. Eight PoE ports. Smart PoE supports keypads, cameras, etc. while maintaining compatibility with non-PoE devices. Prevents audio streams from interfering with network traffic. Conventional switches installed “downstream” from MFSPOE-8 are equally protected.

Key Features / Specifications

- Eight PoE ports
- Smart PoE ports are compatible with non-PoE devices
- Layer 2 MAC Filtering Configuration: Instant - Pre-configured at factory
- Network Switching Hub: Eight 10/100 Ethernet Smart PoE ports
- LAN: One 10/100 Ethernet port
- PoE: 8 Ports (6.2W x 8 = 50W, 1 PORT MAX = 15.4W)
- Power: 48V External Power Supply
- Size: 9.8” x 1.5” x 4.9” (W x H x D)
- Weight: 0.78 lbs

Caution: power supplies for the MFS-8 and MFSPOE-8 are NOT interchangeable!

RFTX-1 Narrow Band Transmitter

The RFTX-1 provides RF transmission capabilities to allow Total Control System Controllers to operate URC Lighting Control products. It utilizes Narrow Band RF for improved adjacent spurious signal rejection.

Key Features / Specifications

- Narrow Band RF transmitter for IP System Controllers
- Enables control of URC Lighting Control products
- Selectable RF frequency switch (418MHz or 433MHz)
- Power and interference (RFI) indicator LEDs
- Includes wall mount and 10’ connecting cable
- Frequency: 418MHz or 433MHz installer selectable
- Indicators: Power and RFI LEDs
- RF Range: 50 to 100 feet, depending upon the environment
- Compatibility: MRX-1, MRX-10
- Power: Through designated port on system controller
- Size: 1.5” x 2.2” x 0.4” (H x W x D)
- Weight: 0.20 lbs

ZR-1n and ZR-2 2.4GHz Transceiver/Repeater

Transmits and receives two-way communications from URC’s 2.4GHz devices such as the TRC-780 Remote and the THZ-100 Thermostat, and relays them to the MRX-10. It acts as a range extender/repeater for these devices.

Key Features / Specifications

- Extends range of URC’s 2.4GHz devices, including the TRC-780 and the THZ-100
- ZR-1n includes external power supply
- ZR-2 plugs directly into standard power receptacle, 100-240 Volts, 50/60 Hz, 0.3 Amps

ZR-1n Key Features / Specifications

- RF Frequency: 2.4GHz
- RF Range: 50 to 100 feet, depending upon the environment
- Power: 6V External Power Supply
- Size: 3.7” x 1.1” x 2.8” (W x H x D)
- Weight: 0.20 lbs

ZR-2 Key Features / Specifications

- RF Frequency: 2.4GHz
- RF Range: 50 to 100 feet, depending upon the environment
- Power: 120 Volts AC (standard wall receptacle)
- Size: 2” x 2.6” x 1” (W x H x D)
- Weight: 0.10 lbs

MFS-8 MAC Filtering Network Switch

Protect the network by preventing audio streams from slowing it down. Eight ports. Conventional switches installed “downstream” from MFS-8 are equally protected.

Key Features / Specifications

- Eight (8) ports
- Layer 2 MAC Filtering Configuration: Instant - Pre-configured at factory
- Network Switching Hub: Eight 10/100 Ethernet ports
- LAN: One 10/100 Ethernet port
- Power: 12V External Power Supply
- Size: 9.8” x 1.5” x 4.9” (W x H x D)
- Weight: 0.78 lbs

PoE-1 Ethernet Power Injector

Use the PoE-1 in place of a PoE switch (like the MFSPOE-8) to provide power to PoE devices via Ethernet cable. Powers IP cameras, keypads, in-wall touchscreens, etc.

Key Features / Specifications

- Compact design with detachable power cord
- Includes power cord
- Power: 100-240V, 0.6A, 50-60Hz
- Size: 5” x 1.5” x 2.5” (W x H x D)
- Weight: 0.20 lbs

PIR-1 IR Code Learning Device

Use the PIR-1 to record and transmit codes from legacy IR remote controls when upgrading to a Total Control system.

Key Features / Specifications

- Compact design
- Includes batteries and USB cable
- Power: Powered via USB connector and/or two AAA batteries (included)
- Size: 1.9” x 5.2” x 0.7” (W x H x D)
- Weight: 0.35 lbs

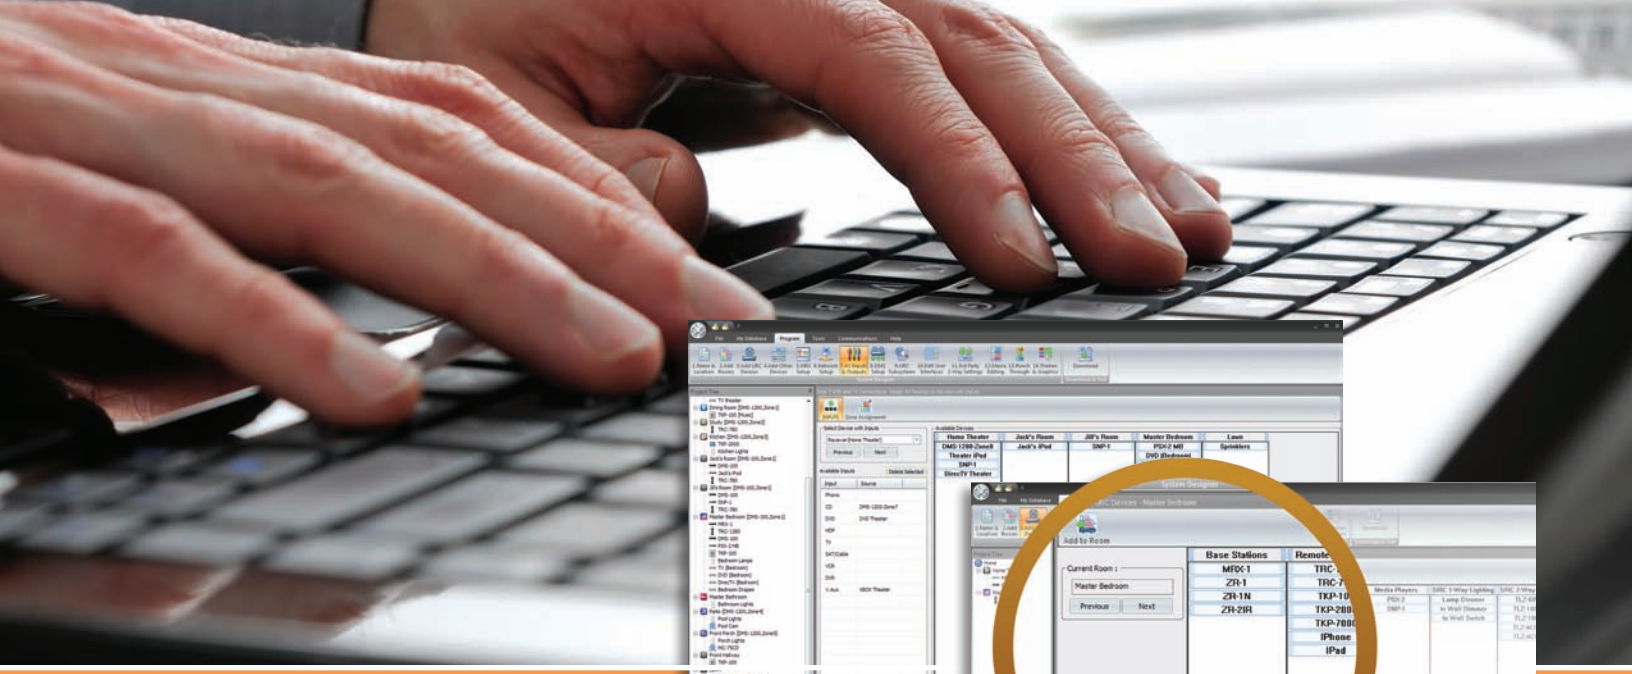

Software

URC Accelerator

URC Accelerator shaves hours and potentially days off of your programming time by creating the user interfaces for your remotes, keypads, and mobile app (iOS) devices. Accelerator also combines all the simple steps to create comprehensive macros, building-wide activities and scheduled events. By automatically creating common activity and power macros, Accelerator does the heavy lifting and provides building blocks to create your own customizable, personalized activities. Review the macros Accelerator has created and make your own edits, additions or deletions in a snap. With Accelerator, you'll get to the end much faster and more confident than ever before.

URC TC Flex

Our newest programming software, TC Flex, was designed to accommodate specific commercial Total Control applications. This software offers a fully customizable platform for programming every product in the Total Control line, allowing you to individually integrate centralized and local subsystems in a way that makes perfect sense. You will create all the interfaces and make your layouts utilizing your own custom graphics or selecting from the extensive library of those supplied. You can build macros to best accommodate your particular commercial installations. With TC Flex it's all about creating the personalize and customized interfaces for your customers.

Offsite Programming

Your clients expect instant gratification, and with both Accelerator and TC Flex software from URC, you can give it to them. No matter where you are, you can program and provide exceptional software service to your clients over the Internet directly to the MRX Advanced Network System Controller. Have a weekend issue that needs immediate attention? You can access that system from anywhere over the internet with no drive time. Handle the inevitable future changes or additions— no problem! Edit, test macros, issue any command, and upgrade features, just as if you were in front of the equipment. With Total Control's powerful off-site programming capability, you can provide great service while saving serious money and time on truck rolls.

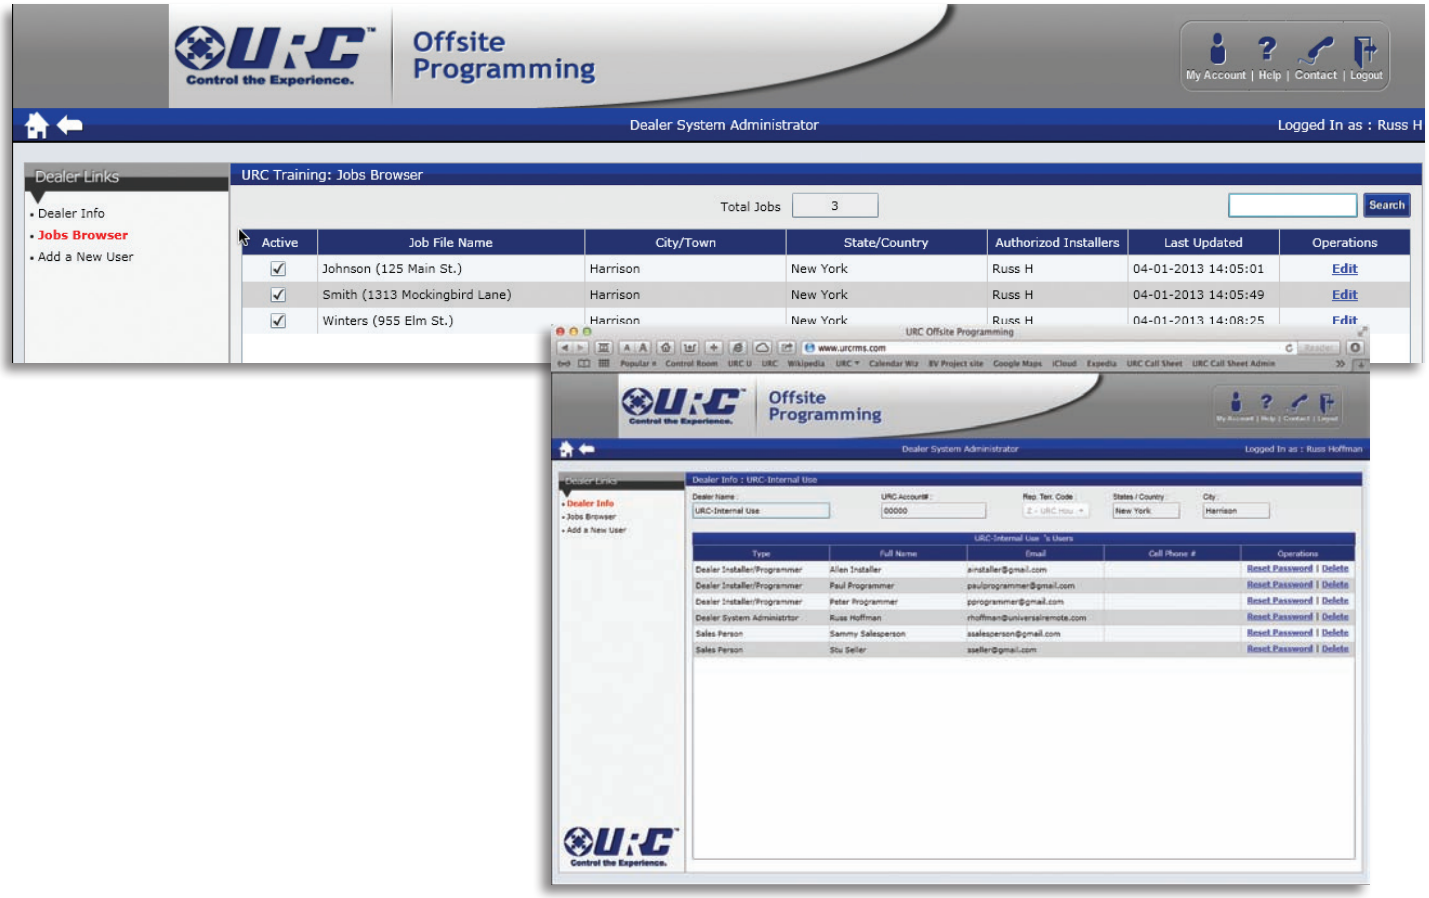

Complete Control

Our award-winning flagship line—the Complete Control™ series—offers premium commercial and residential automation and control solutions for nearly every situation. These time-tested, proven products consist of a wide variety of remote controls, in-room base stations and IP-based networked components that interface with an immense number of third-party products for complete control.

URC has enjoyed the leading market share position in remote controls for years as reported annually by CE Pro. Our rock-solid, reliable remotes are designed with everyday use in mind, yet also include many advanced features, such as large color touch-screen LCDs, haptic feedback that provides the user immediate information on what buttons have been pressed, and extensive personalization and customization.

We are proud of our outstanding reputation for high quality, reliability and technical innovation, and the Complete Control line is a reflection of our ongoing commitment in the area of control and automation.

COMPLETE CONTROL™

User Interfaces

Color LCD Interfaces

URC's powerful assortment of color LCD interfaces includes a remote control for every need and every budget. From the state-of-the-art MX-1200 to the extra economical MX-450, URC's lineup of Complete Control remotes are legendary in the industry because of their proven record for reliability, risk-free Narrow Band RF, extreme customizability and overall value.

MX-1200

IR/RF Touchscreen Remote Control with Color LCD

Key Features / Specifications

- 2.4" (240 x 320) color touchscreen
- Full graphic customization
- 3 Interchangable buttons with pre-labeled selections (x12)
- Advanced logic programming includes variables and conditional logic
- Programmable event timers
- Includes rechargeable Li-Ion battery and charger base
- Also available in "i" version (433MHz)

MX-980

IR/RF Hard Button Remote Control with Color LCD

Key Features / Specifications

- 2.4" (240 x 320) color screen
- Customizable button graphics
- 3 Interchangable buttons with pre-labeled selections (x12)
- Advanced logic programming includes variables and conditional logic
- Programmable event timers
- Includes rechargeable Li-Ion battery and charger base
- Also available in "i" version (433MHz)

MX-890

NEW!

IR/RF Hard Button Remote Control with Color LCD

Key Features / Specifications

- 2” color screen
- Customizable button graphics
- Advanced logic programming includes variables and conditional logic
- Programmable event timers
- Includes rechargeable Li-Ion battery and charger base

MX-880 / MX-880z

IR/RF Hard Button Remote Control with Color LCD

Key Features / Specifications

- 2” color screen
- Use of variables to track power status of devices
- Includes rechargeable Li-Ion battery and charging cord
- Available in “i” version (433MHz)
- Also available in “Z” (2.4Gz) with matching MRZ-260 Base Station

MX-780

IR/RF Hard Button Remote Control with Color OLED

Key Features / Specifications

- 1.5” color screen
- Best entry level remote on the market
- OLED screen offers superior off-axis viewing and better battery life
- Use of variables to track power status of devices
- Powered by four (4) AA-size alkaline batteries
- Also available in “i” version (433MHz)

MX-450

IR/RF Hard Button Remote Control with Color LCD

Key Features / Specifications

- 2” color screen
- No PC required, unit is programmed by hand
- MX-450 Archiver available to save customer files and create templates
- Powered by four (4) AA-size alkaline batteries
- Also available in “i” version (433MHz)

MX-3000

Tablet-style Touchscreen Remote Control with Color LCD

Key Features / Specifications

- 3.5” (320 x 240) color touchscreen
- Full graphic customization
- Advanced logic programming includes variables and conditional logic
- Programmable event timers
- Includes rechargeable Li-Ion battery and charger base
- Also available in “i” version (433MHz)

Common Features

- PC programmable using URC’s CCP software (excluding the MX-3000 and MX-450)
- Narrow Band RF for reliable communication to URC base stations & lighting
- Multi-room capable: Addressable RF to communicate with all/any base stations within RF range
- Programmable sleep timers for macros
- Included library of icons and buttons for screen customization

Mobile Apps for iDevices

Transform your client's iDevices into their favorite mobile controllers with URC's iPad®, iPod® and iPhone® app. This handy solution enables mobile control of A/V components directly over the Local Area Network (LAN). With dazzling interfaces, your clients can do everything from setting a DVR and navigating favorite channels to controlling music, lights and more.

A large portion of the screen can be customized to suit every installation. Plus, add URC lighting control with use of an optional RFTX-1. This app works in conjunction with URC's MRX-1 Network Base Station and MX-remotes. Download is free from the Apple iTunes® store and then paired to the URC controller. The installer matches the MRX-1 to iDevices using a purchased setup card with a unique code. Unlimited iDevices can be added to a system – all for one price!

Complete Control Mobile App (MX-iOS) NEW!

App for iPhone®/iPod touch® and iPad®

Key Features

- Utilize full resolution of the iOS device
- Full graphic customization
- Dazzling, intuitive interface to control integrated systems
- Unlimited iOS devices may be used
- Programmable event timers
- Enables control of A/V components, lighting and more
- MRX-1 is required

MX-iOS MRX Kit NEW!

Complete Kit for iDevice Control

Key Features

- Provides everything you need to provide iDevice control of A/V systems
- Includes (1) URC MRX-1 Network Base Station, (1) CC Control Mobile App setup card, and (1) RFX-250 418 MHz RF Antenna
- Works for iPad®, iPod touch®, and iPhone® products
- Allows for easy addition of any URC MX-Series RF 418 MHz remote control to the system with included RFX-250
- Plus, add lighting control by adding a URC RFTX-1 Transmitter

Text-based Interfaces

With unmatched dependability, URC's ever-popular collection of text-based remotes and keypads have earned a well deserved place in the hearts of tens of thousands of custom installers all over the world. One of the latest additions, the MXW-920 waterproof remote, opens up new opportunities for you and your clients!

MXW-920

IR/RF Waterproof, Weather-Resistant Remote Control

Key Features / Specifications

- Perfect for bars, restaurants, hotels, kitchens, outdoors and poolside areas
- Waterproof and weather-resistant
- JIS Class 4, IP-class 54 (water resistance rating)
- Same programming as MX-900 and KP-900
- PC Programmable via CCP software
- Powered by four (4) AAA-size alkaline batteries
- Also available in "i" version (433MHz)

CEPro BEST

WATERPROOF!

MX-900

IR/RF Text-based Remote Control

Key Features / Specifications

- Superior ergonomic design and button layout
- Same programming as MXW-920 and KP-900
- PC Programmable via CCP software
- Powered by four (4) AAA-size alkaline batteries
- Also available in "i" version (433MHz)

MX-850

IR/RF Text-based Remote Control

Key Features / Specifications

- PC programmable via MX-850 Editor
- Powered by four (4) AAA-size alkaline batteries

MX-350

IR/RF Text-based Remote Control

Key Features / Specifications

- Hand programmable only
- Powered by four (4) AAA-size alkaline batteries

KP-900

Wireless Keypad Remote Control

Key Features / Specifications

- Perfect for retrofit (no wiring required)
- Mounts using supplied wall bracket or built-in magnetic strip
- Available in White, Black and Light Almond
- Adjustable backlight color
- Same programming as MX-900 and MXW-920
- PC Programmable via CCP software
- Powered by four (4) AAA-size alkaline batteries
- Also available in "i" version (433MHz)

Common Features

- Narrow Band RF for reliable communication to URC base stations & lighting
- Multi-room capable: Addressable RF to communicate with all/any base stations within RF range

Network System Interfaces

Native to the Network, only URC offers hybrid products that combine both RF and IP control. As an example, specific URC networked remotes can send commands by Narrow Band RF and receive metadata via WiFi. Designated remotes in the line can talk directly to an MRX-1 Network Controller and can communicate with all URC RF Base Stations.

KP-4000C

Two-way In-wall Network Touchscreen Keypad for IP Control

Key Features

- 3.5" (320 x 240) Color touchscreen
- Full graphic customization
- Advanced logic programming includes variables and conditional logic
- Programmable event timers
- IP communication (wired) over network
- MRX-1 base station required to convert IP to IR/RS-232 or Relays
- Powered over PoE (power over ethernet) using optional POE-1 or external power supply

MX-5000

WiFi IR/RF Two-way Touchscreen Color LCD Remote Control

Key Features

- 2.8" (240 x 320) Color touchscreen
- Full graphic customization
- Advanced logic programming includes variables and conditional logic
- Programmable event timers
- WiFi (802.11 b/g) communication (in addition to IR & RF)
- Vibrating ("haptic") feedback confirms touchscreen button selections
- Includes rechargeable Li-Ion battery and charger base
- Also available in "i" version (433MHz)

Network Solutions

The MRX-1 Network Base Station and PSX-2 Personal A/V Server can be installed as parts of a URC Complete Control system today. The beauty of URC is that the MRX-1 and the PSX-2 can continue to be key components in a Total Control system, as you grow and may wish to add more rooms and products for control.

(See Base Stations and Controllers and Entertainment Sources for additional information).

Photo © Jon Sienkiewicz

About Radio Frequency and URC i-series products

In certain areas of the United States, Radio Frequency (RF) interference can be an issue. In some cases, traditional transmission frequencies of 418MHz can be nearly blocked. As a solution, URC supplies an alternative RF communication of 433MHz known as URC's "i-series" (for example MX-980i). Most of our popular remotes and controllers are available in 433MHz versions as well as the traditional frequency of 418MHz.

The i-series, which operate at 433MHz, are compatible only with other i-series products. For example, the MX-3000i cannot be used with an RFX-250. The RFX-250 receives commands from 418MHz remotes and the RFX-250i receives commands from 433MHz remotes. However, by installing both an RFX-250 and an RFX-250i antenna, it is possible to use both 418MHz and 433MHz remotes in the same system.

Base Stations and Controllers

URC provides the industry's most comprehensive assortment of Base Stations and Controllers for integrated control of A/V components. Whether your client is looking for a one-room solution or a large, sophisticated control system, we have everything you need to do the job right!

We offer a variety of RF base stations that receive radio frequency commands from remotes through walls, doors, and floors to operate components. Customers can store equipment for an entire building in a cabinet or basement, yet control all the TVs and audio gear throughout with one button press. And, we provide RF at different frequencies to assure clients will not experience interference from other nearby devices.

With the world of IP, we offer Network Base Stations that bridge the digital divide between control of clients' legacy components and the IP network. As an example, our MRX-1 can be operated by a MX-5000 or KP-4000C remote or our Complete Control Mobile App for full control of A/V components and lighting.

Whether displayed proudly in an audio rack or hidden safely in a cabinet, our base stations do all of the heavy lifting behind the scenes and let your clients enjoy the magic of control without boundaries.

(Note: the URC MRX-1 can also act as a sub-base station in a Total Control System, receiving commands from an MRX-10 and re-issuing them via IR, RS-232, or Relays).

Rear Panel View

MRX-1
Network Base Station

Key Features / Specifications
- 6 IR outputs
- 6 adjustable IR outputs
- 1 Local Area Network (LAN) port
- External antenna optional (URC part # RFX-250) for RF communication
- 418MHz or 433MHz via optional RFTX-1, RFX-250 or RFX-250i

Rear Panel View

MSC-400
Master System Controller

Key Features / Specifications
- Control components via IR, RS-232, and Relays
- Stores macros which are triggered by URC remotes for rock-solid reliability
- Track on/off status via video and voltage sensors
- PC programmable with CCP (URC's universal programming platform)
- Includes RFX-250, 433MHz control via optional RFX-250i

Common Features
- IR routing to send specific commands to desired ports
- IR addressable allowing multiple base stations to communicate with a single remote or multiple remotes to a single base station

MRF-260
RF to IR Base Station

Key Features / Specifications
- Four IR outputs
- Adjustable IR outputs (2)
- Integrated antenna
- Built-in front panel IR blaster
- Also available in 418MHz and "i" (433MHz) versions

MRZ-260
2.4 GHz RF to IR Base Station

Key Features / Specifications
- Four IR outputs
- Adjustable IR outputs (2)
- Integrated antenna
- Built-in front panel IR blaster

Note: Use this companion base station to the MX-880Z and avoid RF collision caused by simultaneous button presses. Great solution for MDUs and other densly populated areas/projects.

MRF-350
RF to IR Base Station

Key Features / Specifications
- 6 IR outputs
- Adjustable IR outputs (6)
- External antenna included to improve range and reliability
- Up to 3 RFX-250 can be added to increase range and reliability
- Built-in front panel IR blaster
- Also available in "i" version (433MHz)

Complete Control Accessories

CCP Line Accessories

RFTX-1
Narrow Band Transmitter for IP or Z (2.4 GHz) base stations

RFX-250
Additional Antenna Module for MSC-400, MRX-1 and MRF-350

POE-1
Power-Over-Ethernet Injector

PIR-1
USB connected IR learner and tester

MSC-400 & MRX-1 Accessories

VID6
Video Sensor Cable for MSC-400

RS232M
RS-232 Cable with Male DB-9 for MSC-400 and MRX-1

RS232F
RS-232 Cable with Female DB-9 for MSC-400 and MRX-1

VS-1006
Voltage Sensor Cable for MSC-400 and MRX-1

MSC-START
Starter Kit for MSC-400 includes 2-VID6, 1-RS232M, 1-RS232F, 2-VS1006, and 6-IRS (for outputs 7-12)

IRS6
IR Sleeved Emitters for MSC-400 (Outputs 7 thru 12) and MRX-1

USB5M
5 Meter USB Programming Cable for MSC-400 and MRX-1

MS-01
Master Slave RS-232 Cable for MSC-400 and MRX-1

IR6
IR Standard Emitters for MSC-400 (Outputs 1 thru 6) and MRX-1

Software

URC CCP Software

The products in this catalog are programmed by URC authorized professional installers using URC's universal Complete Control Programming (CCP) software. Editing, making changes and copying and deleting are done with ease by the installer. With our broad library of popular product and codes, you'll be up and running in no time.

Graphics can be customized by leveraging our vast, built-in library of buttons, channels, and icons or you can import graphics of your own on applicable URC remotes. Additionally, many tools are available for free or a nominal cost in the Tool Box area of the URC Control Room, our dealer-only website. Create macros and schedule events, and reuse them from one project to another. CCP software also employs advanced logic such as variables and conditional statements. With URC software and our world-class training, you'll complete jobs faster and even more confident than ever before.

"One of the greatest things about URC's remotes is that they program using URC's powerful CCP software. This means that when you've learned to program one, you pretty much know how to program them all. Also, adding additional remotes to existing projects is fast and simple."

John Sciacca, Residential Systems

URC does not provide programming software or programming support to end consumers. The customization needs of our clients are best and most quickly fulfilled by fully trained, authorized URC dealers who specialize in custom control systems.

Total Control / Complete Control Lighting

URC Lighting Solutions

URC Lighting Control by Lutron® offers complete control of lights. Our products are simple to install, easy to program, and a pleasure to use. Offering wall-mounted dimmers, wall-mounted switches and table top lamp dimmers, our solutions give you a one-stop-shop for all your lighting needs.

Native Lighting Control

Directly control Dimmers, Lamp Dimmers and Switches with URC remote controls. Installation requires no new wiring and no black boxes, making URC lighting products some of the easiest on the market to install. The user can also reset the lighting scenes—by themselves—using a simple press-and-hold operation.

Using an MRX-1 in the system? Just add an RFTX-1 transmitter. It's really that simple.

Why Lighting Control?

Lighting control provides convenience and saves energy dollars for your clients! Plus, it is an easy, affordable addition to Audio/Video control systems you are already installing. URC offers you and your customers premium lighting products backed by leading brand names people trust and the very best in intuitive control.

LUTRON

Wallbox Switches and Accessory Switches

Wallbox Switch

Single-Room Lighting Control Switch (controlled directly via RF and URC remotes)

Key Features / Specifications

- Native Control directly from remote–no black-box interface in most installations
- For use where Dimmer is not possible or not preferred (i.e., to control wall outlet)
- End-user can reset lighting scenes without help from installer
- Manufactured for URC by Lutron®

Multi-Location Accesory Switch

Companion Switch for Multi-Location Wiring

Key Features / Specifications

- Use up to nine accessory switches with only one RF controlled switch

Wallbox Dimmers and Accessory Dimmers / Table Top Lamp Dimmers

Incandescent/Halogen Wallbox Dimmer

Single-Room Lighting Control Dimmer (controlled directly via RF and URC remotes)

Key Features / Specifications

- Native Control directly from remote–no black-box interface in most installations
- Compatible with MRX-1 via RFTX-1 transmitter
- End-user can reset lighting scenes without help from installer
- Manufactured for URC by Lutron®

Incandescent/MLV Wallbox Dimmer

Single-Room Lighting Control Dimmer (controlled directly via RF and URC remotes)

Key Features / Specifications

- Native Control directly from remote–no black-box interface in most installations
- Compatible with MRX-1 via RFTX-1 transmitter
- End-user can reset lighting scenes without help from installer
- Manufactured for URC by Lutron® one RF controlled switch

Multi-Location Accessory Dimmer

Companion Dimmer for Multi-Location Wiring

Key Features / Specifications

- Use up to nine accessory dimmers with only one RF controlled dimmer

Dimmers (including RF Lamp Dimmers) designed for incandescent/halogen lamps are not compatible with MLV or ELV.

Lamp Dimmer

Single-Room Lighting Control Lamp Dimmer (controlled directly via RF and URC remotes)

Key Features / Specifications

- Native Control directly from remote–no black-box interface in most installations
- No wiring required—lamp plugs in directly
- End-user can reset lighting scenes without help from installer
- RF controlled Wallbox Switches and Lamp Dimmers also available
- Manufactured for URC by Lutron®

Training

3 time winner

URC Dealer Training – Committed to Excellence

URC is committed to delivering the industry's finest training, as evidenced by our three, consecutive CE Pro Quest for Quality Platinum Awards, for Training Programs. This is CE Pro's highest award level. We offer live, nationwide training throughout the year in-field and at URC Headquarters, via live webinars and 24/7 self-paced online training at URC University ("URC U"). We provide training at the InfoComm show, and our annual CEDIA EXPO training is second-to-none, spanning the length of the show and attracting thousands of dealers annually for URC certifications and CEDIA CEU credits.

In 2012, our entire Training, Sales, Marketing and Support teams embarked on a substantial addition to our live training sessions, hosting more than 1,000 dealers in New York and LA for two-day, immersive hands-on sessions for the Total Control line. These sessions have carried into 2013 with two-day sessions specifically designed for our commercial dealers and representatives, so that they can interact on best practices, system applications design, product training and much more.

All of URC's ongoing live trainings are highly interactive, entertaining and educational! We provide direct access to our finest instructors and executives, who enjoy answering questions and sharing ideas and strategies to help you propel your business forward.

"URC's was one of the best training sessions I have ever attended!"

- Matt Brotzge, Head Programmer / Sales
Surround Sounds, Exton

URC live trainings are highly interactive, entertaining and educational! We provide direct access to our finest educators and executives, who enjoy addressing your questions and sharing advice, ideas and strategies to help propel your business forward.

URC University – The Industry's Best 24/7 Online Training

In addition to live trainings, our online URC U provides top-notch training on your schedule. Available 24/7, 365 days per year, URC U offers a wide variety of self-paced courses for Total Control, Complete Control and general IP networking concepts that dealers must learn to compete in our ever-changing world of custom installation. Easily download handouts, manuals and related items, as well as track your training progress; sign up for live webinars, even sign in electronically for live events.

All of your learning experiences are documented, creating a transcript that provides an archive of your completed courses. Certificates of completion are easily downloaded for all completed courses. Plus, many URC U courses offer CEDIA CEU credits. So take advantage of all we have to offer by joining the 15,000 professionals worldwide who have taken more than 50,000 courses on URC U!

URC UNIVERSITY
LEARN & EARN

universalremote.com/university

URC Control Room – It's All About You

This password-protected, dealers-only site provides info on all things URC you need to know. Log on to find an extensive collection of the videos, tech tips, sales and marketing materials, training info, manuals and other technical resources. Our user forum is accessed by dealers and is monitored by URC personnel, ensuring all your questions get answered. You can even buy and sell modules created by URC, third-party vendors and dealers like you through the URC Tool Box, an app store that takes programming to the next level. The Control Room is your constant companion when navigating the wide world of URC.

Across the Board Sales and Marketing Support

URC
COMMERCIAL APPLICATIONS GUIDE
COMMERCIAL DIVISION
Conference Rooms | Restaurants | Sports Bars | Houses of Worship | Retail | Digital Signage

URC's sales and marketing programs are a core focus of our operation. Our dealer selling tools and programs have escalated to new heights with the addition of Total Control. Visit MyTotalControl.com to access information.

For specific commercial applications, visit universalremote.com and select our corporate overview section. Here you will find many useful tools including a commercial overview for URC as well as our new commercial applications guide that will give you applications diagrams, product specification lists and much more.

We welcome your feedback, and in the process, you'll build personal relationships with our sales and marketing teams that will draw mutual benefits for years to come.

About URC

A Passion for Quality, Service and Training

We are passionate about control and driven by our customers' convenience. URC is dedicated to producing only the highest quality products that deliver the maximum positive experience to consumers worldwide.

For more than 20 years, URC has been setting the standard for innovation with over 100 million products delivered in the last ten years alone. Headquartered in Harrison, N.Y., the Company provides state-of-the-art remote controls and complete home control and automation systems to residential and commercial clients, including LG, DIRECTV, EchoStar, Samsung, Mitsubishi, Toshiba, Zenith, Denon, Harman Kardon, McIntosh, and countless others.

URC has built its reputation by delivering exceptional levels of quality, training, reliability and support to its dealers and customers. Our products are backed by a highly trained technical support staff. And we provide the most complete training program to assure that the installation, programming and servicing of our products is conducted with the highest level of proficiency and professionalism.

Technological Leadership

Our worldwide engineering teams work closely together to produce the most technologically advanced products that employ innovative solutions for Narrow Band RF (Radio Frequency) control, IR (Infrared) and IP (Internet Protocol) control. Our IP solutions are "Native to the Network" and are among the most advanced on the market.

Manufacturing Superiority

Our control products are manufactured in Asia and North America in ISO 9001, ISO 14001 and TS 16949 certified factories using the highest possible environmental management standards. We follow the most stringent quality assurance protocol in the industry to meet today's highest standards.

URC General Terms and Conditions

Ordering Information

Universal Remote Control, Inc. (URC) does not sell directly to end users. URC accepts orders submitted through our Sales Reps ONLY. URC does not accept orders directly from resellers. For more information on your Sales Rep, please visit our website or call us at (914) 835-4484. For information on Shipping, Freight Policy, Payment, Refused Orders or Returned Shipments, please contact your Sales Rep.

Warranty Information

All URC products that are purchased from an authorized dealer have a one year USA Limited Warranty. Products that were not purchased from an authorized dealer are not covered by the USA Limited Warranty and should be returned to place of purchase. URC strictly prohibits online selling of URC products.

Dealer Additional Benefits and Programs

URC provides FREE freight for resellers (our choice of carrier) on qualifying orders. Additionally, we belive that we can realize our full potential by working together. To that end, we provide resellers with selling and marketing programs designed to help your business grow and be most profitable. To find out more about programs and volume discounts, please contact your regional Representative or URC Sales Manager.

Return Authorization

All products being returned for service, repair or exchange require an RGA#. Please complete a Return Request Form which you can get either from your URC Sales Rep or by contacting returnrequest@universalremote.com.

Any product returned without a proper RGA# or to any address other than our Valhalla, NY Distribution Center will be refused. Defective products being returned for exchange must be in the original factory carton, with all original packing materials and manual. All missing materials are subject to surcharge. A copy of the original invoice must accompany all returns. Returns must be freight prepaid. Products returned freight collect will be refused. No refunds. You may have certain rights granted by laws that vary from state to state.

For additional, important information, please refer to URC's official Terms and Conditions of Sale. All specifications, model names and numbers, and prices are subject to change without notice.

Control the Experience.

Universal Remote Control, Inc.
Harrison, NY USA
universalremote.com
(914) 835-4484

Download
This Catalog
To Your iPad
Now!

© 2013 Universal Remote Control, Total Control, and Complete Control are registered trademarks of Universal Remote Control, Inc. All other trademarks are property of their respective owners. All information contained in this catalog is reliable but is subject to change without notice.